


BAV70LT1 SWITCHING DIODE

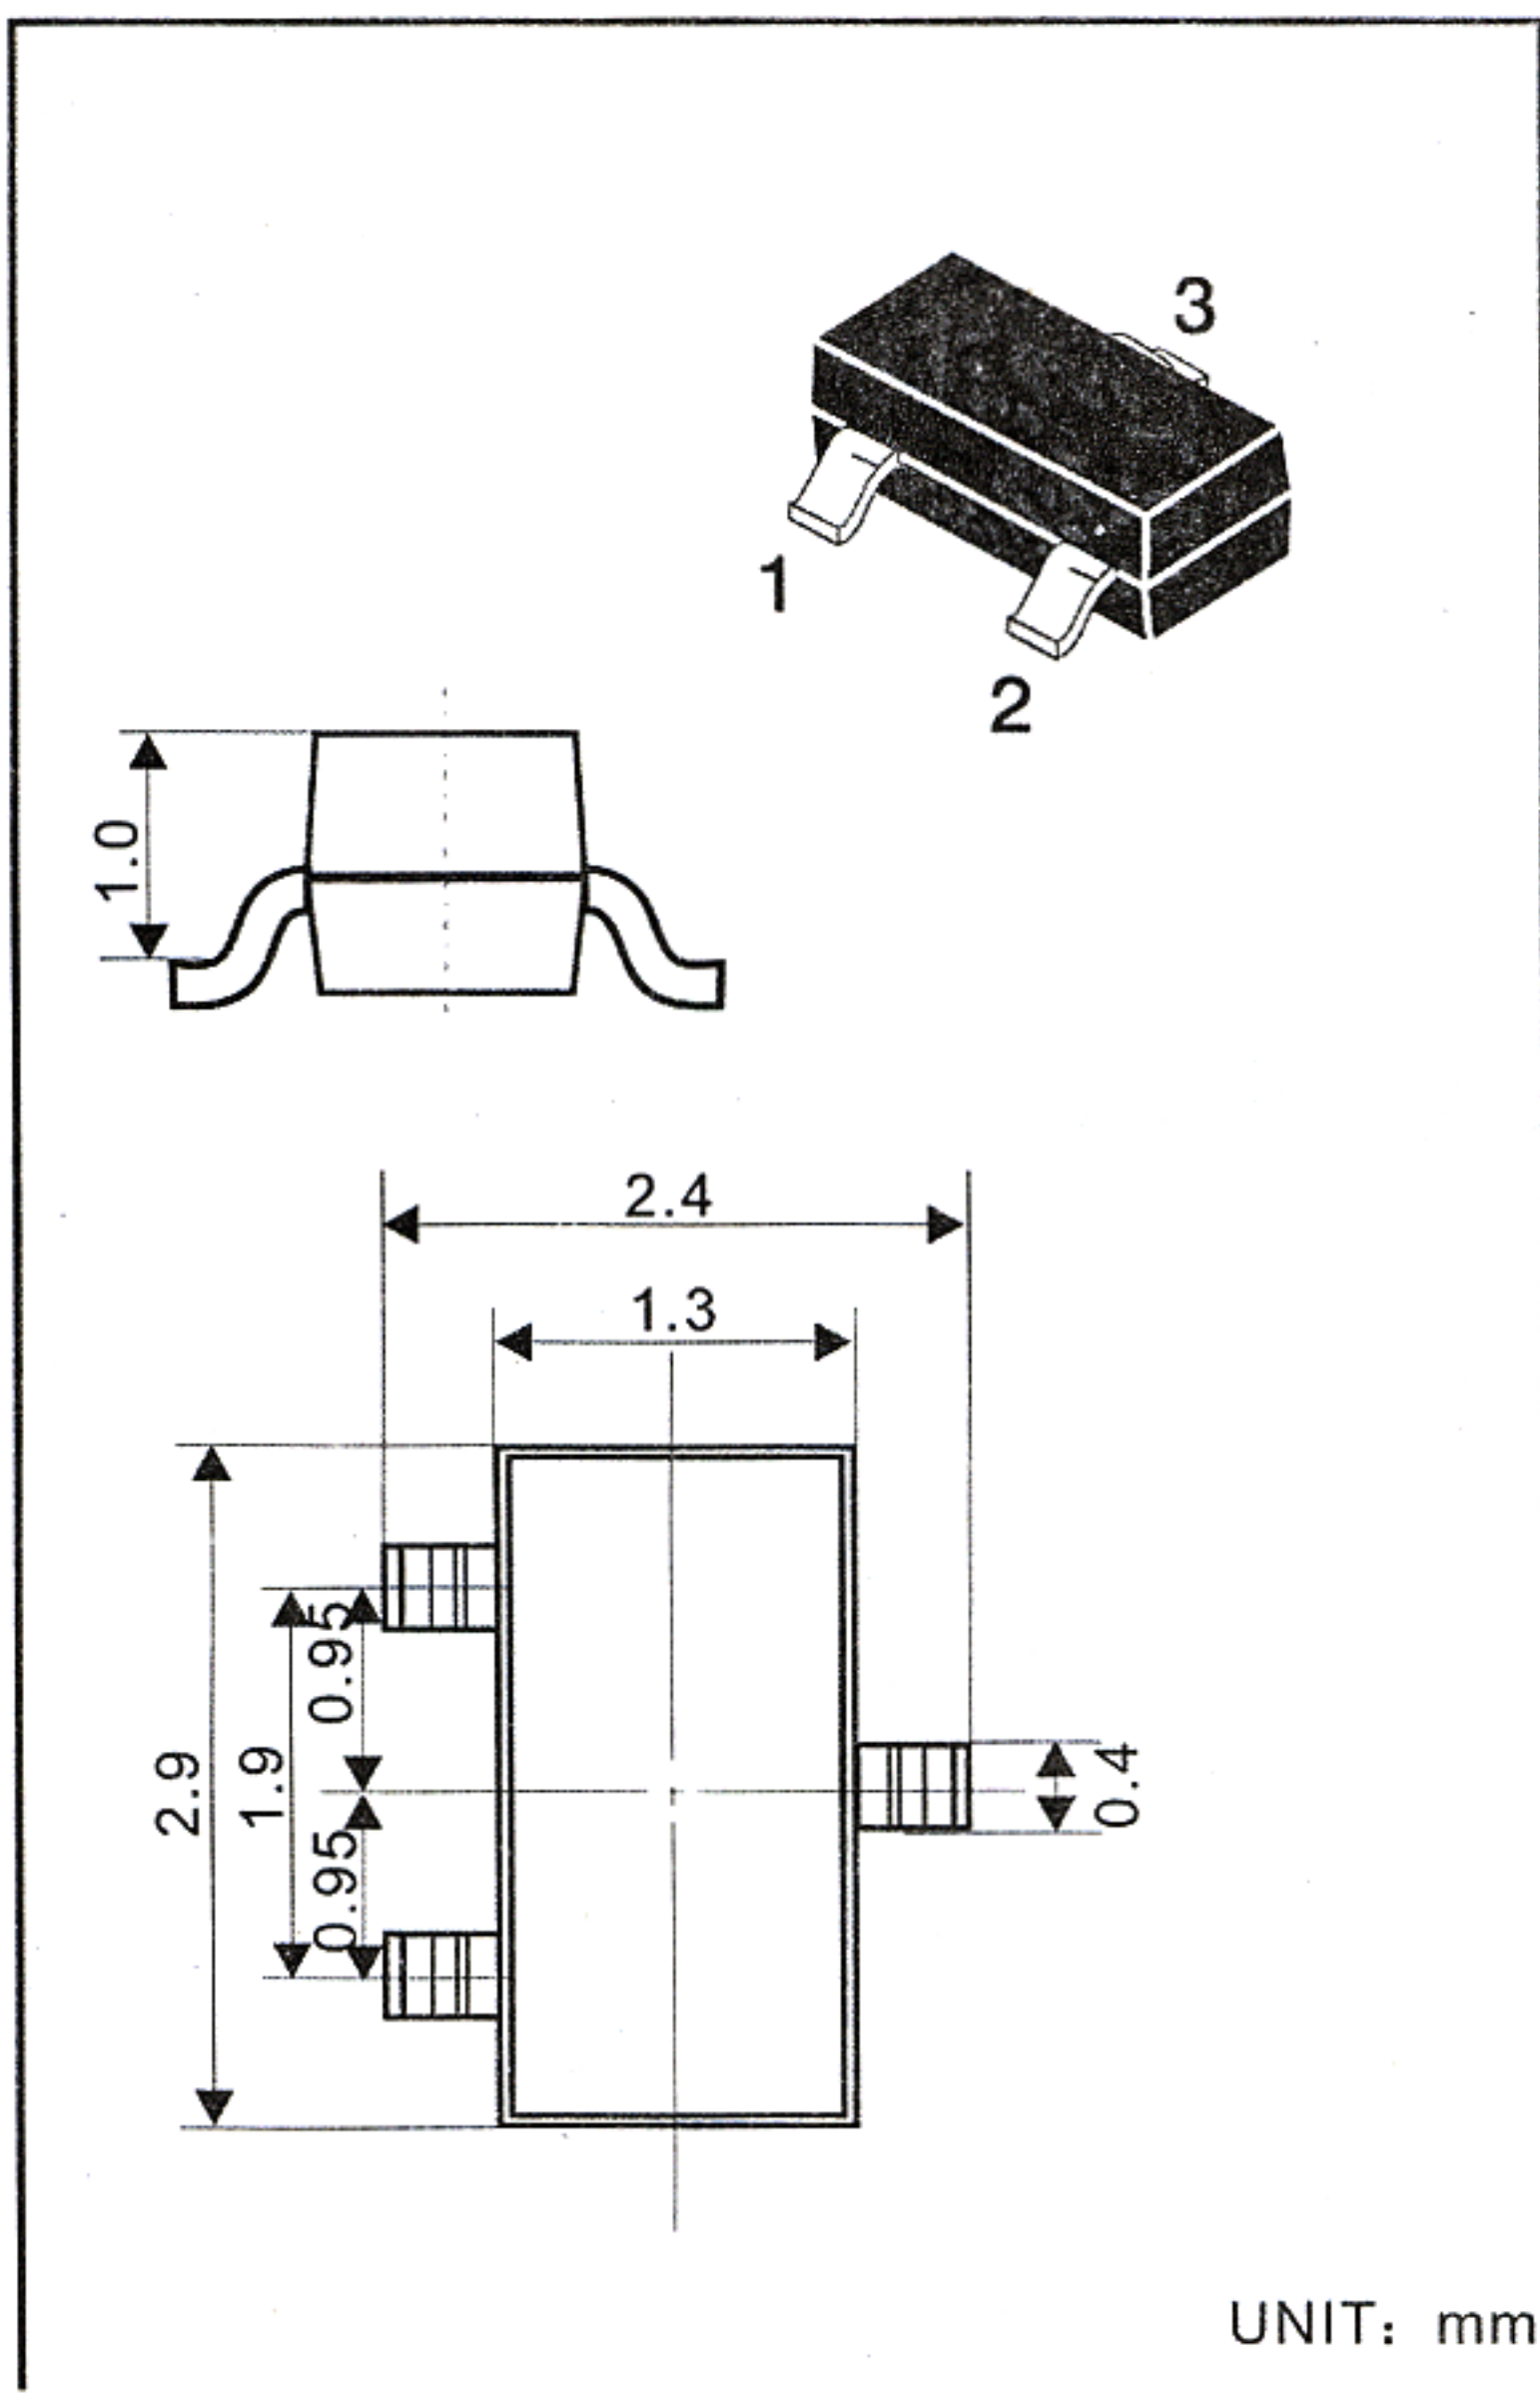

FEATURES

Power dissipation

P_D : 225mW ($T_{amb}=25^\circ\text{C}$)

Forward current


I_F : 200mA

Reverse voltage

V_R : 70V

Operating and storage junction temperature range

T_J, T_{stg} : -55°C to $+150^\circ\text{C}$

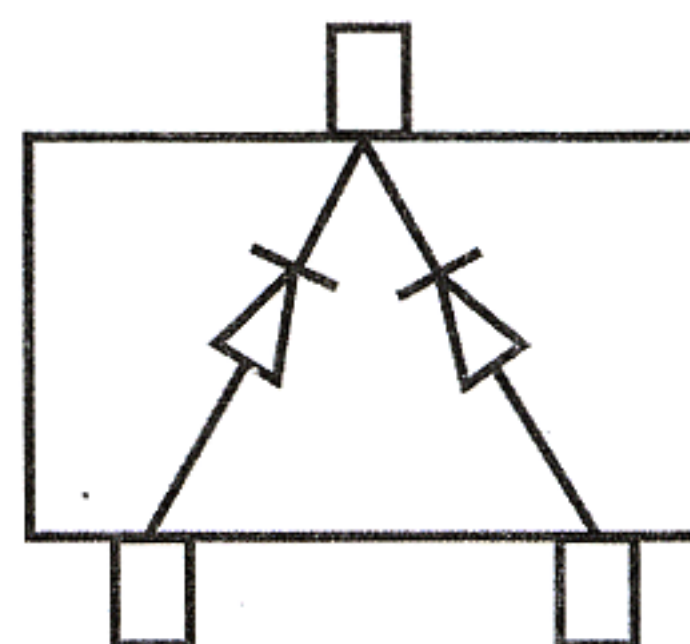

MARKING: A4

ELECTRICAL CHARACTERISTICS

($T_{amp}=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Reverse breakdown voltage	$V_{(BR)}$	$I_R=100\ \mu\text{A}$	70		V
Reverse voltage leakage current	I_R	$V_R=70\text{V}$		2.5	μA
Forward voltage	V_F	$I_F=1\text{mA}$ $I_F=10\text{mA}$ $I_F=50\text{mA}$ $I_F=150\text{mA}$		715 855 1000 1250	mV
Diode capacitance	C_{tot}	$V_R=0\text{V}, f=1\text{MHz}$		1.5	pF
Reverse recovery time	t_{rr}	$I_F=I_R=10\text{mA}$ $I_{rr}=0.1I_R$		6	ns